

Ifw



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: SABBATINO et al.

Group No.:

Serial No.: 10/804,696

Filed: March 19, 2004

Examiner:

For: TRANSMITTER OPTICAL SUB ASSEMBLY, FOR INSTANCE FOR HIGH SPEED OPTICAL TRANSCEIVERS

Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

TRANSMITTAL OF CERTIFIED COPY

Attached please find the certified copy of the foreign application from which priority is claimed for this case:


Country : EPO  
Application Number : 03251711.2  
Filing Date : March 19, 2003

**WARNING:** "When a document that is required by statute to be certified must be filed, a copy, including a photocopy or facsimile transmission of the certification is not acceptable." 37 CFR 1.4(f) (emphasis added.)

Reg. No.: 44,695

Tel. No.: (203) 259-1800

Customer No.: 2512

  
SIGNATURE OF ATTORNEY

Joseph V. Gamberdell

Type or print name of attorney

Perman & Green, LLP

P.O. Address

425 Post Road, Fairfield, CT 06824

RECEIVED  
AUG 12 2004  
OIPE/JCWS

NOTE: The claim to priority need be in no special form and may be made by the attorney or agent if the foreign application is referred to in the oath or declaration as required by § 1.63.

(Transmittal of Certified Copy [5-4])



**THIS PAGE BLANK (USPTO)**



**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

**Patentanmeldung Nr.    Patent application No.    Demande de brevet n°**

03251711.2

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**R C van Dijk**

**THIS PAGE BLANK (USPTO)**



Anmeldung Nr:  
Application no.: 03251711.2  
Demande no:

Anmeldetag:  
Date of filing: 19.03.03  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Agilent Technologies  
395 Page Mill Road,  
P.O.Box 10395  
Palo Alto, CA 94303-0870  
ETATS-UNIS D'AMERIQUE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Transmitter optical sub assembly, for instance for high speed optical  
transceivers

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

H01S/

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI

**THIS PAGE BLANK (USPTO)**

"Transmitter optical sub assembly, for instance for high speed optical transceivers"

\* \* \*

5 Transmission speed is an ever-increasing parameter in data communication systems. Achieving and ensuring the required performance levels of such systems with conventional methods of packaging optoelectronic components are increasingly difficult at transmission speeds of 10 Gbit/s and higher.

10 This is particularly true for optical communication transceivers for use in systems where large volumes of data are aggregated to form serial data streams with very high rates. These data streams are subsequently used to drive light sources such as laser sources. As  
15 the transmission speed/rate increases, apparatus such as optical transmitters intended to have small dimensions and required to be produced at low cost is exposed to significant issues in terms of thermal management and signal integrity.

20 At transmission rates of 10 Gbit/s and higher, the existing solutions for producing a transmitter optical sub assembly (TOSA) are particularly exposed to critical operating conditions. This applies to both basic types of TOSA arrangements currently adopted.

25 A first type of known TOSA arrangement is shown in figures 1 and 2. These figures refer to TOSA packages of the types currently referred to as TO-CAN and planar, respectively. Either type of arrangement includes a laser diode driver LDD and a laser diode LD  
30 assembled in the same package PKG that is traversed by electrical lines L. These types of arrangement are advantageous in that the connections between the laser driver LDD and the laser diode LD may be minimized.

The main drawback of this arrangement lies in that  
35 heat dissipated by the driver is transferred to the

laser diode by conduction, convection and IR emission within the common package. Laser diode performance degrades with increasing temperature, and careful thermal management is needed in order to guarantee the  
5 desired performance. Thermal management is usually effected by cooling the laser by means of Peltier devices, which however add to the overall power consumption while also leading to additional costs and dimensions of the module.

10 Alternatively, laser diodes may be employed that are adapted to operate at higher temperatures, but this has a negative impact in terms of yield and overall costs of the transmitter. Extensive use of thermally  
15 conductive materials, which may also help in the circumstances outlined in the foregoing, inevitably entails higher costs.

Another type of known TOSA arrangement is exemplified in figure 3. There, the laser source LD is  
20 located on an optical bench OB and packaged alone within the package PKG. The laser driver is placed on a printed circuit board PCB, outside the package.

This latter solution is advantageous in terms of thermal management. Designing the electrical  
25 connections between the laser diode and the driver is however more complicated and less effective. Impedance mismatch between the laser driver and the laser diode creates electrical reflections that lead to impairment of electrical performance, particularly at high bit rates.

30 This problem could be avoided by adding in series with the laser diode a resistor to match the driver impedance. However, in such an arrangement, a part of the signal power is lost due to the voltage drop across the matching resistor. Also, the laser driver output  
35 swing is limited and related to the supply voltage;



this solution can thus be resorted to only by using a higher supply voltage (5 V or more). This choice leads to higher power dissipation and adds to the system complexity, since all the other circuits in a transceiver are usually fed from a 3.3 V power supply.

The object of the present invention is thus to provide an improved arrangement wherein the drawbacks referred to in the foregoing are dispensed with. According to the present invention, such an object is achieved by means of an arrangement having the features set forth in the claims that follow.

A preferred embodiment of the invention is thus a transmitter optical sub assembly including a laser source having associated therewith a laser driver and a package for the laser source and the laser driver. The package includes respective separate compartments for the laser source and the laser driver. The laser source and the laser driver are arranged in the respective separate compartments whereby the laser source is exempt from being directly irradiated by the laser driver.

This is preferably due to the package wall, which is opaque to IR emission, thus separating the two devices.

Preferably, a package with two compartments is used: the first compartment, surrounded by walls and hermetically sealed, hosts the laser diode with the alignment optics; the second compartment is simply a base member to place the laser driver and other auxiliary components.

A preferred thermal path guarantees thermal dissipation from the laser driver. A good electrical path is preferably guaranteed by the fact that the electrical path is laid out onto a substrate such an alumina substrate.

The arrangement described hereafter provides a good solution in terms of both thermal dissipation and signal integrity without requiring a matching resistor.

The invention will now be described, by way of example only, with reference to the enclosed figures of drawing, wherein:

- figures 1 to 3, representative of the prior art, have been already described in the foregoing, and
- figure 4 is a schematic representation of an arrangement according to the invention.

In figure 4, a transmitter optical sub assembly (briefly TOSA) is shown.

This includes a laser source such as a laser diode 10 mounted on an optical bench 12 and arranged for launching optical radiation into an optical fiber 14. One or more feed-through lines 16 connect the laser source 10 to an associated laser driver 18. Additional lines 20 connect the laser driver 18 to corresponding circuitry mounted on a printed circuit board 22.

The arrangement of parts and components just described is -- per se -- conventional in the art, which makes it unnecessary to provide a more detailed description herein.

The laser diode 10 is housed in a package 24. This is essentially comprised of a shaped body of a material opaque to infrared radiation such as a ceramics (e.g. alumina), possibly including a charge.

The package 24 is a two-compartment package.

A first compartment, generally indicated 26, is surrounded by walls and hermetically sealed by a lid 28. The compartment 26 hosts the laser diode 10 with the alignment optics 14a (of a known type) with the fiber 14. The end portion of the fiber 14 and the feed through lines 16 from the laser driver 18 extend through the walls of the compartment 26.

As shown in figure 4, the second compartment designated 30 may simply be a base member extending from the body of the package and adapted to place the laser driver 16 and other auxiliary components.

5 The second compartment 30 of the package may include a recess (not shown) for at least partly housing the laser driver 16. Such a recessed mounting is suitable for possibly reducing wire-bonding lengths towards the laser driver 16.

10 Reference 32 denotes a thermal path, usually comprised of one or more metalizations extending through the package 24 towards a plate 34. The plate 34 is generally exposed to the outside surface of the package 24 and/or may include a ribbed configuration to  
15 guarantee good thermal dissipation from the laser driver.

As a consequence of the laser source 10 and the laser driver 18 being arranged in two separate compartments of the package 24, the laser diode 10 not  
20 being directly irradiated by the laser driver. This is primarily due to the package wall located there between, which is opaque to IR emission, thus separating the two devices.

Electrical paths such as the feed through lines 16  
25 are preferably laid out onto a substrate such as an alumina substrate. This facilitates control of RF performance while avoiding any unwanted parasitic element, while also permitting feed through circuits to be designed that correct carries the signal up to 10  
30 GHz and more.

Moreover, the absence of boundary walls in the second compartment 30 leaves additional space available for additional components, while also permitting the dimensions of the package to be reduced beyond what is

currently admitted by conventional single compartment solutions.

By way of summary, the arrangement just described offers a unique benefit to fiber optic transceivers while ensuring good high frequency signal transmission and blocking the heat irradiated to the laser source from the laser driver. Additionally a hermetic package solution for the laser diode is offered while also giving the possibility of further reducing the overall dimension of the package.

Of course, without prejudice to the underlying principle of the invention, the details and embodiments may vary, also significantly, with respect to what has been shown and described, just by way of example, without departing from the scope of the invention as defined by the annexed claims.

said compartment (26) provided in said package (24) for said laser source (10).

8. The assembly of any of the previous claims, characterized in that it includes feed through lines  
5 (16) connecting said laser source (10) to said laser driver (18), wherein said lines are laid out onto a substrate such as an alumina substrate.

9. The assembly of any of the previous claims, characterized in that said package (24) includes a  
10 compartment (26) for hosting said laser source (10) together with alignment optics (14a) associated therewith.

10. The assembly of any of the previous claims, characterized in that the compartment (30) provided in  
15 said package (24) for said laser driver (18) is defined by a base member extending from the body of the package (24).

11. The assembly of any of the previous claims, characterized in that the compartment (30) provided in  
20 said package (24) for said laser driver (18) is defined by a base member exempt from boundary walls.

12. The assembly of any of the previous claims, characterized in that the compartment (30) provided in  
said package (24) for said laser driver (18) includes a  
25 recess for at least partly housing the laser driver (18).

13. The assembly of any of the previous claims, characterized in that the compartment (30) provided in  
said package (24) for said laser driver (18) has  
30 associated a thermal path (32, 34) extending through the package (24).

14. The assembly of claim 13, characterized in that said thermal path includes at least one metalization (32) extending through the package (24).

## CLAIMS

1. A transmitter optical sub assembly including a laser source (10) having associated therewith a laser driver (18) as well as a package (24) for said laser source (10) and said laser driver (18), characterized in that said package includes respective separate compartments (26, 30) for said laser source (10) and said laser driver (18), the laser source (10) and the laser driver (18) being arranged in said separate compartments (26, 30) whereby said laser source (10) is exempt from being directly irradiated by said laser driver (18).

2. The assembly of claim 1, characterized in that said package (24) includes a package wall opaque to IR emission separating said laser source (10) and said laser driver (18).

3. The assembly of either of claims 1 or 2, characterized in that said package (24) is essentially comprised of a shaped body of an IR opaque material.

4. The assembly of either of claims 1 or 2, characterized in that said package (24) is essentially comprised of a shaped body of a ceramics material.

5. The assembly of either of claims 1 or 2, characterized in that said package (24) is essentially comprised of a shaped body of alumina.

6. The assembly of any of the previous claims, characterized in that the compartment (26) provided in said package (24) for said laser source (10) is surrounded by walls.

7. The assembly of claim 6, characterized in that it includes feed through lines (16) connecting said laser source (10) to said laser driver (18), and in that said feed through lines (16) extend through the walls of

15. The assembly of either of claims 13 or 14, characterized in that said thermal path (32) extends towards a plate (34).

16. The assembly of claim 15, characterized in that  
5 said plate (34) is generally exposed to the outside surface of the package (24).

17. The assembly of either of claims 15 or 16, characterized in that said plate (34) includes a ribbed configuration to guarantee thermal dissipation.

10

**THIS PAGE BLANK (USPTO)**



## ABSTRACT

A transmitter optical sub assembly includes a laser source (10) having associated therewith a laser driver (18) and a package (24) for housing the laser source (10) and the laser driver (18). The package includes respective separate compartments (26, 30) for the laser source (10) and the laser driver (18), wherein a package wall, which is opaque to IR emission, separates the laser source (10) from the laser driver (18). The laser source (10) and the laser driver (18) are arranged in those separate compartments (26, 30) whereby the laser source (10) is exempt from being directly irradiated by the laser driver (18).

(Figure 4)

5

**THIS PAGE BLANK (USPTO)**

Fig. 3

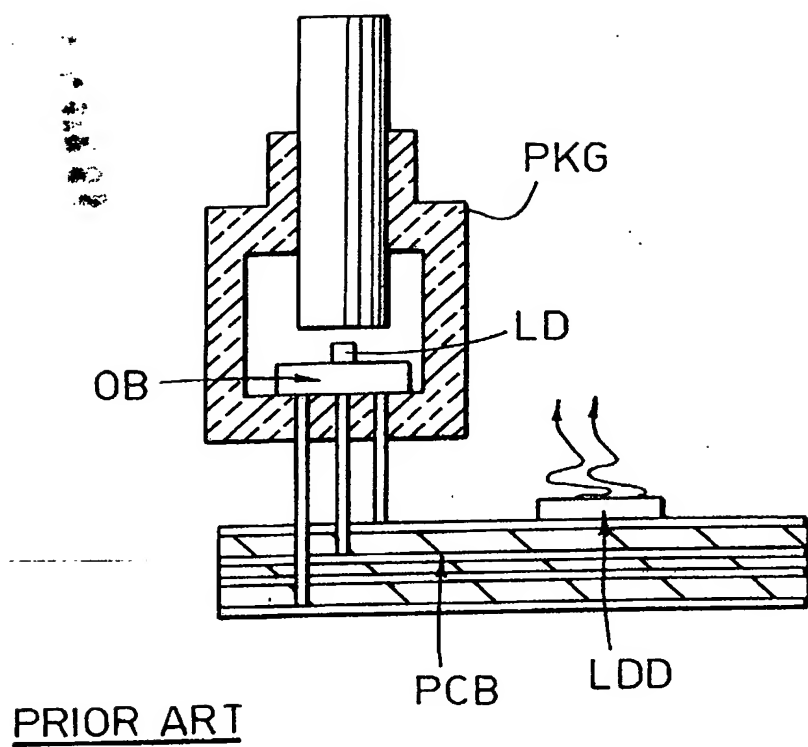


Fig. 4



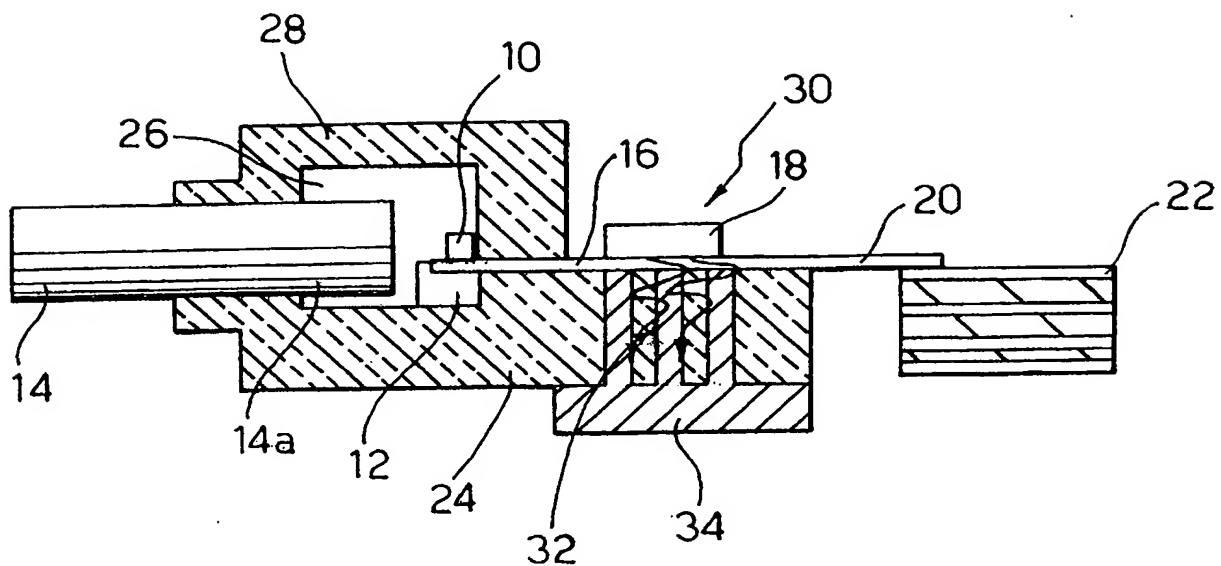


Fig. 1

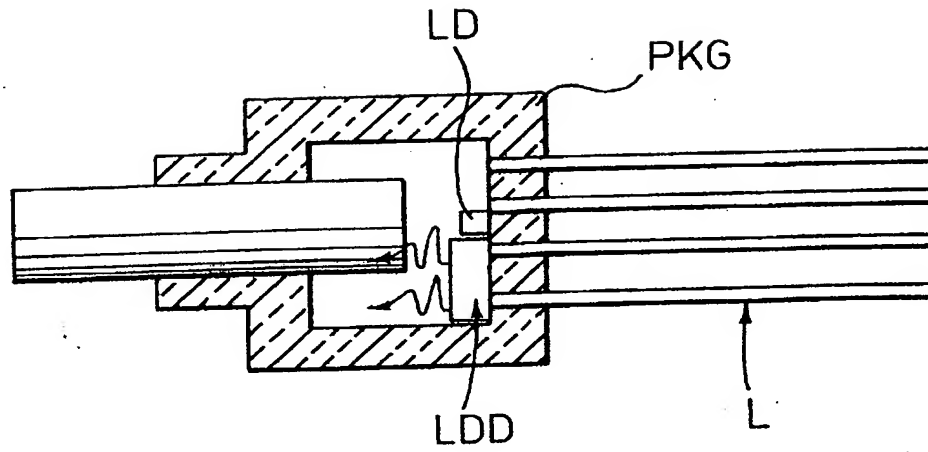

PRIOR ART

Fig. 2

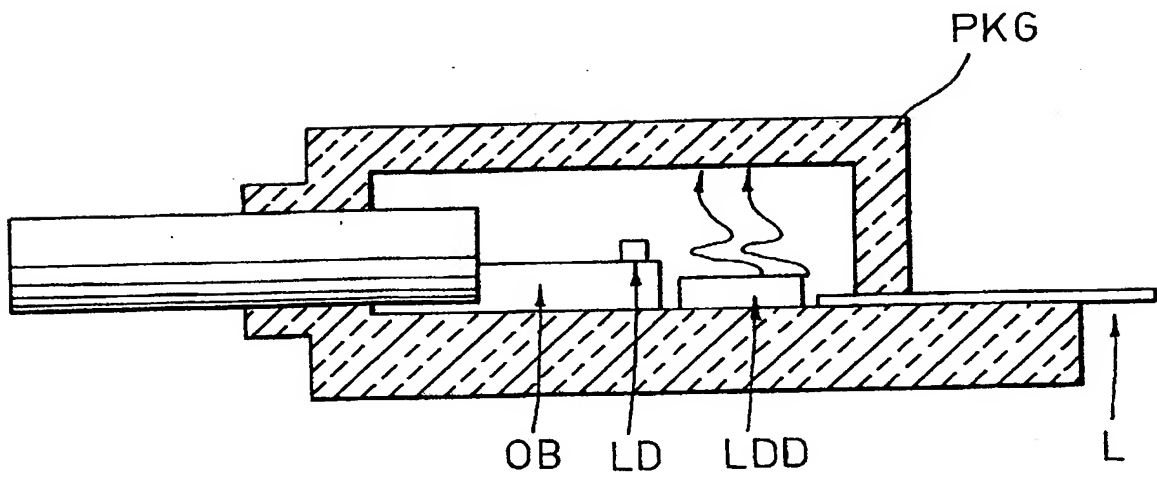

PRIOR ART